

Montréal, 24 juillet 2025.

SCOTT LSLIP
ROUND ENGINEERING
10 SEGWUN ROAD
WATERDOWN ONTARIO
CANADA L8B 0K6

Fabricant : CRYOVATION
9B MARY WAY
HAINESPORT NJ
USA 08036

Numéro de dossier : 941973

Numéro(s) de dessin(s) : As per scope of CRN registration
Reports R-0885A, R-0885B

Objet : Enregistrement des plans et devis – Confirmation de l'enregistrement

Bonjour,

Nous vous informons que votre demande d'enregistrement de plans et devis a été traitée et que cette conception a été enregistrée sous le numéro d'enregistrement canadien (NEC\CRN) suivant : **0H20461.56**.

Nous portons votre attention sur certaines exigences réglementaires concernant les installations sous pression, ainsi que des codes et normes qui y sont associés :

- Le fabricant doit maintenir un programme de contrôle de la qualité valide pour fabriquer un équipement selon ce NEC;
- Ce numéro d'enregistrement demeure valide tant et aussi longtemps que les paramètres de conception demeurent inchangés. Dans le cas d'accessoires, l'enregistrement est valide pour une durée de 10 ans à partir de la date d'enregistrement. Les documents de conception doivent alors être resoumis pour validation;
- Le fabricant doit nous transmettre une copie de la *Déclaration de conformité du constructeur (Manufacturer's Data Report)* pour chaque appareil ou chaudière fabriqué selon ce NEC dans les 30 jours suivant la signature de cette déclaration;
- Le numéro de dessin enregistré et le numéro de révision doivent être indiqués sur la déclaration de conformité pour les équipements fabriqués selon ce NEC.

Le présent avis d'approbation ne dégage pas le fabricant de ses responsabilités quant à la conception ou à la construction des équipements ou d'accessoires fabriqués selon un NEC.

Salutations distinguées,

Direction des équipements sous pression

Montréal

255, boul. Crémazie Est, 2ième étage

Montréal (Québec) H2M 1L5

Téléphone : 514 873-2546

Sans frais : 1 866 262-2084

enregistrementdesplans@rbq.gouv.qc.ca

www.rbq.gouv.qc.ca

Montréal, le 24 juillet 2025.

SCOTT LSLIP
ROUND ENGINEERING
10 SEGWUN ROAD
WATERDOWN ONTARIO
CANADA L8B 0K6

Manufacturer : CRYOVATION
9B MARY WAY
HAINESPORT NJ
USA 08036

OUR REFERENCE : 941973

Design number : As per scope of CRN registration
Reports R-0885A, R-0885B

Subject: Design registration confirmation

Hi,

We wish to inform you that your design registration application has been evaluated and that it was registered under the following Canadian Registration Number (CRN): **0H20461.56.**

The following is a reminder of your obligations regarding certain requirements of the regulation respecting pressure vessels, and the referenced codes and standards:

- The manufacturer must maintain a valid quality control program to manufacture equipment according to the CRN.
- The CRN remains valid as long as there are no changes to the design calculations that might affect the pressure boundary. The design registration of fittings expires 10 years after acceptance. It must, therefore, be resubmitted for validation.
- The manufacturer shall submit a copy of the *Manufacturer's Data Report* to us for each boiler or pressure vessel manufactured according to this CRN within 30 days following the signing of this report.
- The drawing number and the revision number registered under this CRN must be indicated on the *Manufacturer's Data Report* for equipment manufactured according to the CRN.

This notice of approval does not relieve the manufacturer of their responsibilities with respect to the design or fabrication of equipment manufactured according to this CRN.

Yours sincerely,

Direction des équipements sous pression

Montréal

255, boul. Crémazie Est, 2ième étage
Montréal (Québec) H2M 1L5
Téléphone : 514 873-2546
Sans frais : 1 866 262-2084
enregistrementdesplans@rbq.gouv.qc.ca
www.rbq.gouv.qc.ca

Statutory Declaration Registration of Fittings

Building Act (B-1.1)
Regulation respecting pressure vessels (B-1.1, r. 6.1)
Boiler, pressure vessel, and pressure piping code (CSA B51)

This declaration must be filled out and sent to the Régie du bâtiment du Québec (RBQ) by pressure fitting manufacturers when they make an application registration for fittings.

For more information on the application registration for fittings, consult the www.rbq.gouv.qc.ca/fittings-pv.

1. Fittings to register

List the fittings included in this declaration and that you wish to register.

N°	Description	Additional information (detail, calculations or approval sheets)
1	MANIFOLD ASSEMBLY,	
2	SCOPE OF CRN, REPORTS,	
3	DRAWINGS,	
4	CALCULATIONS,	
5	COMPANY LOGO - SEE RIGHT	

2. Declaration of the person in charge

The person in charge is someone in a position of authority, such as a vice-president, a plant manager or a chief engineer.

2.1 Design

I, the undersigned, Nate Boyd Vice President
(Name of the person in charge) (Title of the person in charge)

from Cryovation, LLC, located at 9B Mary Way, Hainesport, NJ, 08036, USA
(Company's name) (Plant's address)

hereby declare that the above-mentioned fittings and subject to the Regulation respecting pressure installations:

☐ comply with the requirements of the ANSI/ASME codes as to their dimensions, identification, material and purpose
or
☒ are not covered by the ANSI/ASME codes, but are in compliance with ASME B31.3
(Name of code or standard)

code or standard and are designed according to the best current engineering practice, as proven by the enclosed approval report.

2.2 Manufacturing quality control

I further declare that the manufacture of these fittings is controlled by a quality control program that complies with the requirements of the following code: CSA B51, and has been verified by Bureau Veritas
(Name of code) (Authorized agency)

Signature of the person in charge:  Date (yyyy-mm-dd): 2025-05-15

3. Declaration of commissioner for oaths

I certify that this declaration has been administered before me, at 98 Murray/Hainespoint RD, on 2025-05-15.
(Location) (Date (yyyy-mm-dd)):

Signature of commissioner for oaths:

Date (yyyy-mm-dd):

Stamp the seal:

PEDRO P FIGUEROA
NOTARY PUBLIC
STATE OF NEW JERSEY
ID # 2359017
MY COMMISSION EXPIRES APR. 24, 2027

4. Registration confirmation (for RBQ's use only)

As far as I know, this application complies with the requirements of the Act and with standard CSA B51, Part 1, section 4.2, and is accepted for registration in the class _____.

This registration expires in ten (10) years after the date of registration indicated above, and it must be validated again after this period.

Canadian registration number (CRN):



Registration date (yyyy-mm-dd):

Documents to attach

Any application registration for fittings must include these documents:

- Statutory Declaration Registration of Fittings (2 copies)
- Detailed calculations or burst test report (1 copy)
- Detailed technical drawings or catalogues (2 copies)
- Example of the manufacturer's marking (1 copy)
- Proof that a valid and approved quality control program has been implemented (1 copy)
- Form Application for design registration (1 copy)

Sending the form

This declaration is necessary to submit an application for design registration. Design registration applications must be sent by email only to enregistrementdesplans@rbq.gouv.qc.ca.

Documents must be in PDF format and in separate files.



CRYOVATION, LLC


9B MARY WAY
HAINESPORT, NJ
08036, USA

08-May-18


Page 1 of 1

SCOPE OF CRN REGISTRATION

Product Description	Dwg. No.	Design Code	Size NPS x Thickness	Material	MAWP at MAWT	MDMT (F)	Report
Manifold Assembly	014-SPEC-SS	ASME B31.3, 2016	1/2" Sch. 40	ASTM A312-304/304L, ASTM A182-304/304L (Note 2)	3000 psig at 120F	20F	R-0885A
Manifold Assembly	014-SPEC-SS	ASME B31.3, 2016	1/2" Sch. 80	ASTM A312-304/304L, ASTM A182-304/304L (Note 2)	6000 psig at 120F	20F	R-0885A
Manifold Assembly	014-SPEC-BRASS	ASME B31.3, 2016	0.840" OD x 0.20" Wall	ASTM B927 UNS C26000 Brass (Note 3)	3000 psig at 120F	20F	R-0885B
Manifold Assembly	014-SPEC-BRASS	ASME B31.3, 2016	1.05" OD x 0.23" Wall	ASTM B927 UNS C26000 Brass (Note 3)	3000 psig at 120F	20F	R-0885B

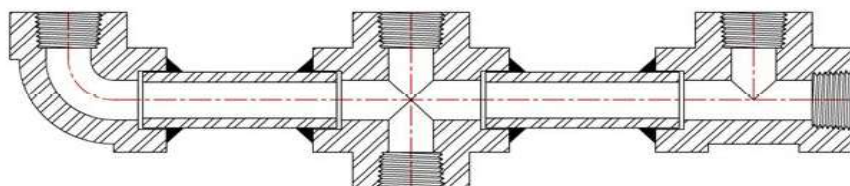

STAINLESS STEEL

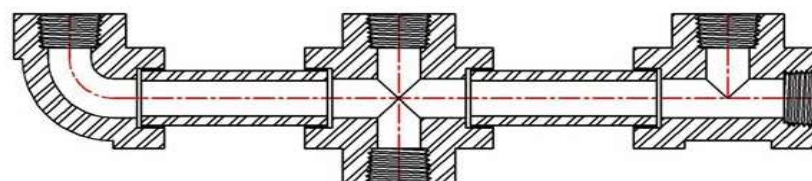

BRASS

Note 1: Per CSA Table 1 Note (2)(B) the total volume of any configured manifold assembly shall not exceed 1.5 cubic feet in volume.

Note 2: Type 316 SS may substitute for Type 304 SS.

Note 3: Other Brass, Copper and Copper Alloy grades may be used as long as they have a ASME B31.3 Table A-1 allowable stress value equal to or larger than 8000 psi at 120F.

